

HYDRANT KEY WITH BAR

ALUMINIUM, CONVENTIONAL



Hydrant Key with bar is used to operate underground hydrants. The combined key can be used for opening the hydrant cover, as well as operation of the hydrant valve.

Brief Description : AAAG Hydrant Key, made of Aluminium, nominal length 1000 mm (min), complete with bar for operating the key. The key shall match the underground valve spindle, and the bar shall insert into the key to allow easy operation of the hydrant.

1.0 GENERAL DATA

1.1	Make	AAAG
1.2	Model	Hydrant key with bar
1.3	Key Slot	Matching to Hydrant spindle
1.4	Material of Construction	Aluminium
1.5	Reference	SBJ Drawing (See below)

2.0 MATERIAL OF CONSTRUCTION

2.1	Body	Aluminium,
2.2	Bar	Aluminium,

3.0 TESTING AND QUALITY CONTROL

3.1	Dimensional check	(See Drawing Below)
3.2	Performance Requirements	--
3.3	Documentation	Internal inspection report, supplier's certificates, approved laboratory test certificates

4.0 OPERATIONAL/ TECHNICAL DATA

4.1	Working pressure	--
4.2	Weight (Approx.)	--

5.0 FINISH



5.1	Hydrant Key & Bar	Natural Finish
-----	-------------------	----------------

6.0 APPROVALS & MARKING

6.1	Approvals	--
6.2	Marking on Nozzle	AAAG/ Year of Mfg / Sl. No

7.0 WARRANTY

7.1	Warranty & Guarantee	12 Months from the date of supply
-----	----------------------	-----------------------------------

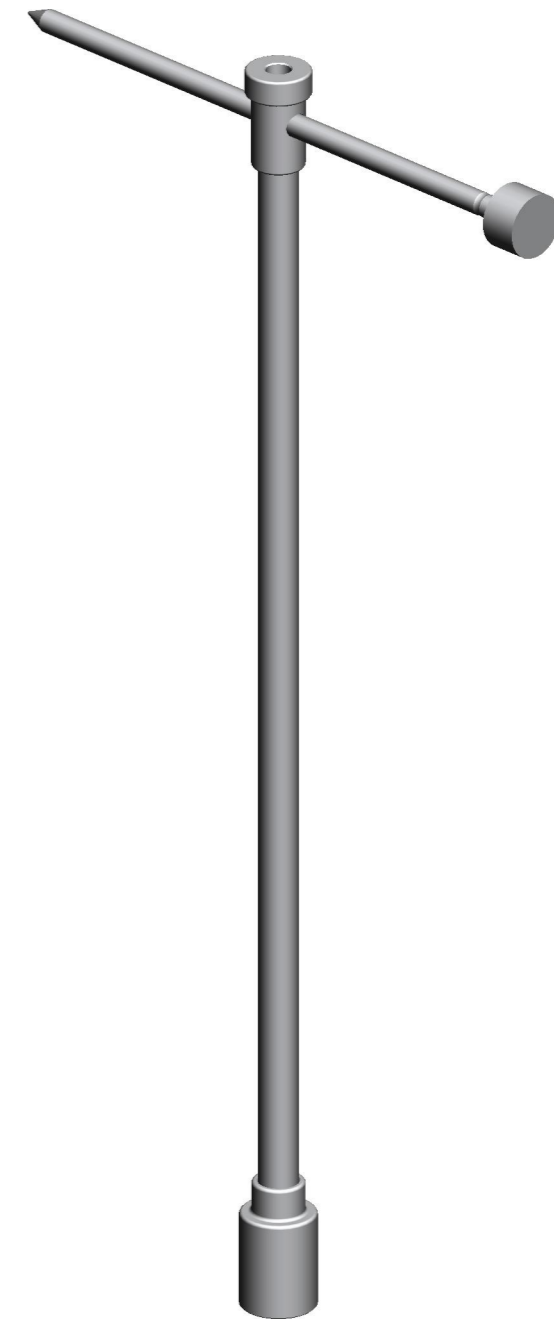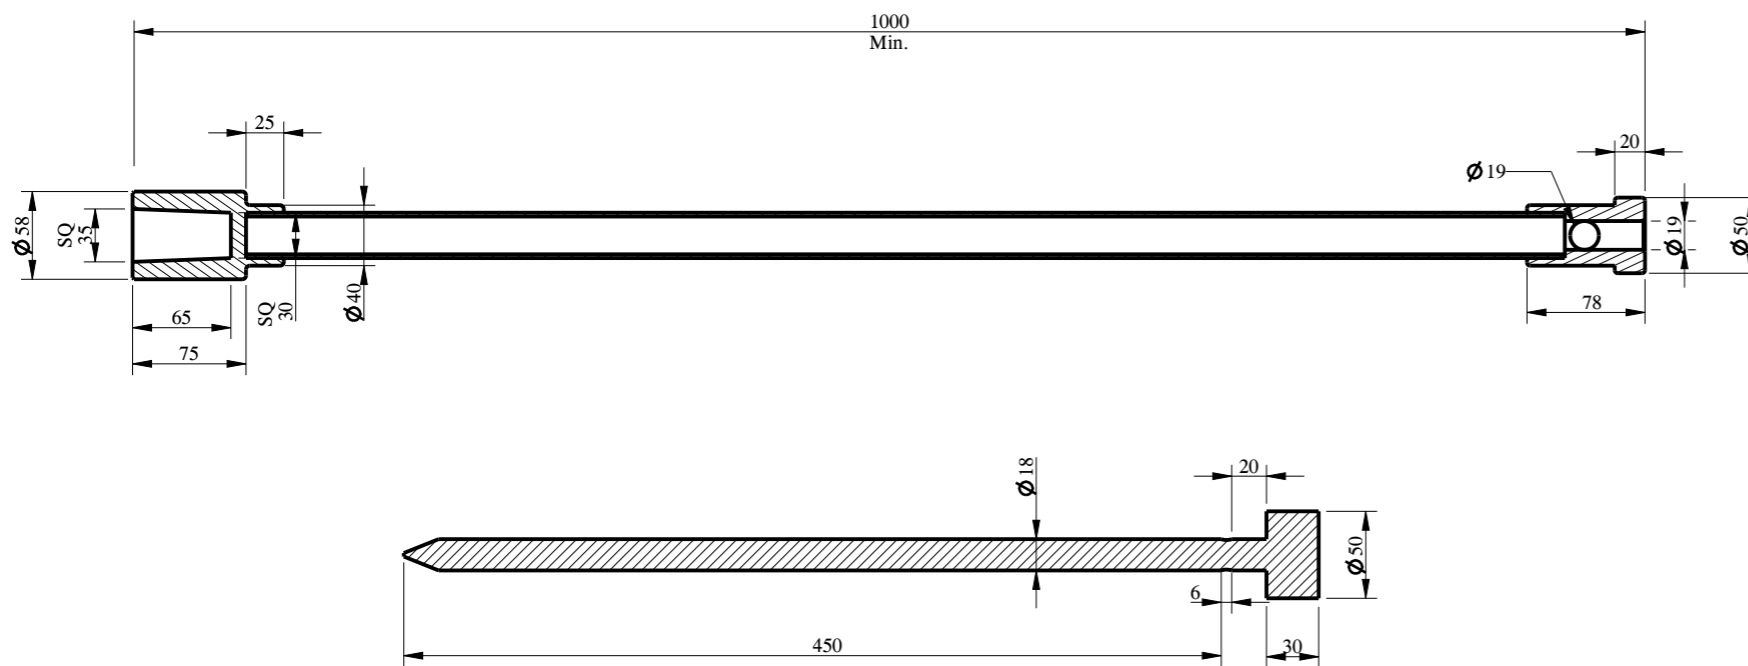

Shah Bhogilal Jethalal & Bros.

AHMEDABAD

TITLE :

Hydrant Key With Bar,
Aluminium Conventional Design

SCALE

DRAWING NO:

SHEET

REV.

N.T.S

A200A-00CL

1 OF 1

0