ADAPTOR

SS316, 75 mm, MALE ROUND THREADS x MALE BSP THREADS



Adaptors allow connection of delivery or suction hoses to different fittings/equipment, which have a dissimilar connecting arrangement, e.g. connecting hoses to equipment having threaded connections, connecting instantaneous hose couplings to flanged equipment, connecting hoses having similar couplings, or hoses of two different sizes, etc.

Brief Description: AAAG Male Round Thread (75 mm) x Male Thread (BSP, 75 mm) Adaptor, made of Stainless Steel (SS316), suitable for use with Firefighting equipment/systems having matching Female BSP threads (75 mm). Male Round Threads shall be matching to standard Female Round threads (75 mm size). Lugs shall be provided for easy tightening of adaptor.

1 (•	EDAI	$D\Delta T\Delta$

1.1 Make AAAG1.2 Size 75 mm

1.3 Inlet Male Round Thread (75 mm)
1.4 Outlet Male BSP Thread (75 mm)
1.5 Material of Construction Stainless Steel (SS316)

1.6 Reference --

2.0 MATERIAL OF CONSTRUCTION

2.1 Adaptor SS316, IS:3444 Grade IV

3.0 TESTING AND QUALITY CONTROL

3.1 Dimensional check See drawing below

3.2 Hydrostatic Pressure Test 21 kgf/cm² for 2.5 minutes
3.3 Documentation Internal inspection report, supplier's certificates, approved laboratory test certificates

4.0 OPERATIONAL/ TECHNICAL DATA

4.1 Working Pressure Range upto 14 Kgf/cm²

4.2 Weight (approx.) ---

5.0 FINISH

5.1 Adaptor Polished


6.0 APPROVALS & MARKING


6.1 Approvals ---

6.2 Marking AAAG/ Year of Mfg./SI No

7.0 WARRANTY

7.1 Warranty & Guarantee 12 Months from the date of supply

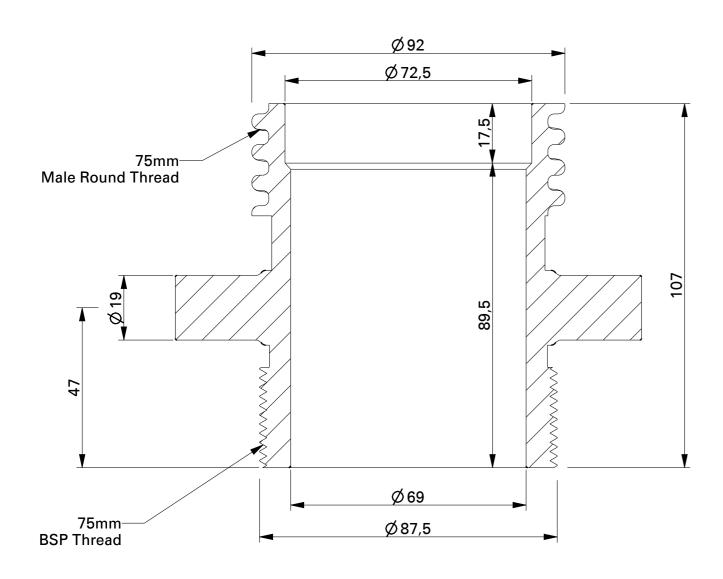

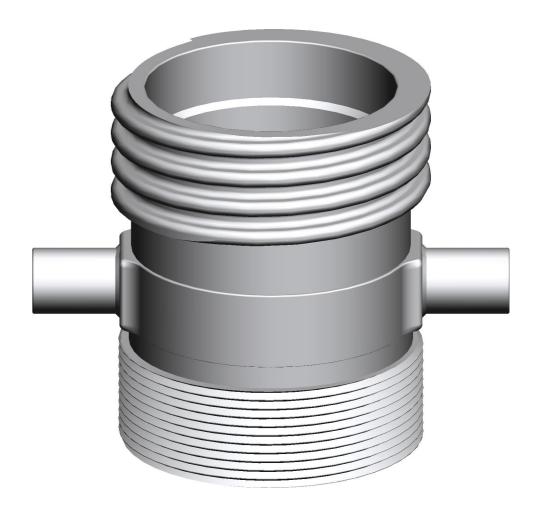



Shah Bhogilal Jethalal & Bros.

AHMEDABAD

TITLE:

Male Round Thread (75 mm) x Male Threaded (BSP, 75 mm) Adaptor, SS 316

SCALE	DRAWING NO:	SHEET	REV.
N.T.S	SM177-75BJ	1 OF 1	0