

LOW EXPANSION FOAM BRANCH

(900 LPM, ALUMINIUM, SELF-INDUCTING)



LX (Low Expansion) Foam Branches are handheld equipment, used to project mechanical foam from a distance onto fires which involve flammable liquids. Self-Inducting Foam branches are provided with pick-up tubes to allow induction of foam concentrate into the branch and mixing with the water stream.

Brief Description : AAAG LX (Low Expansion) Foam Branch of nominal foam solution capacity 900 lpm (FB 20X) at 7.0 Kgf/cm², constructed of Aluminium material. Branch shall have self-inducting arrangement with pick-up tube, shall produce good quality low expansion foam (min. 10 times expansion) and have effective throw.

1.0 GENERAL DATA

1.1	Make	AAAG
1.2	Model	Foam Making Branch Pipe FB 20X (900 lpm)
1.3	Inlet	63mm Instantaneous Male Inlet
1.4	Outlet	Foam Discharge Pipe
1.5	Material of Construction	Aluminium
1.6	Reference	IS: 2097

2.0 MATERIAL OF CONSTRUCTION

2.1	Pipe	Aluminium IS:7882
2.2	Inlet body	Aluminium, Gr.4450, IS:617
2.3	Holding Ring/Handles	Aluminium, Gr.4450, IS:617
2.4	Inlet Male Instantaneous	Gunmetal IS:318 LTB2
2.5	Pick-up Tube	Non-collapsible PVC Braided Hose

3.0 TESTING AND QUALITY CONTROL

3.1	Dimensional check	As per IS:2097 (See Drawing Below)
3.2	Performance Requirements	Flow: 900-1000 lpm at 7.0 kg/cm ² , Range 24 Mtrs (min), Foam expansion 1:10 (min).
3.3	Documentation	Internal inspection report, supplier's certificates, approved laboratory test certificates

4.0 OPERATIONAL/ TECHNICAL DATA

4.1	Working pressure	7 to 10 Kgf/cm ²
4.2	Length (Approx)	1135 mm
4.3	Weight (Approx.)	6.0 Kgs.

5.0 FINISH



5.1	Branch	Painted - Fire Red Color as per IS: 5 Shade No. 536
-----	--------	---

6.0 APPROVALS & MARKING

6.1	Approvals	--
6.2	Marking on Nozzle	AAAG/ Year of Mfg./ Capacity/ SL. No

7.0 WARRANTY

7.1	Warranty & Guarantee	12 Months from the date of supply
-----	----------------------	-----------------------------------

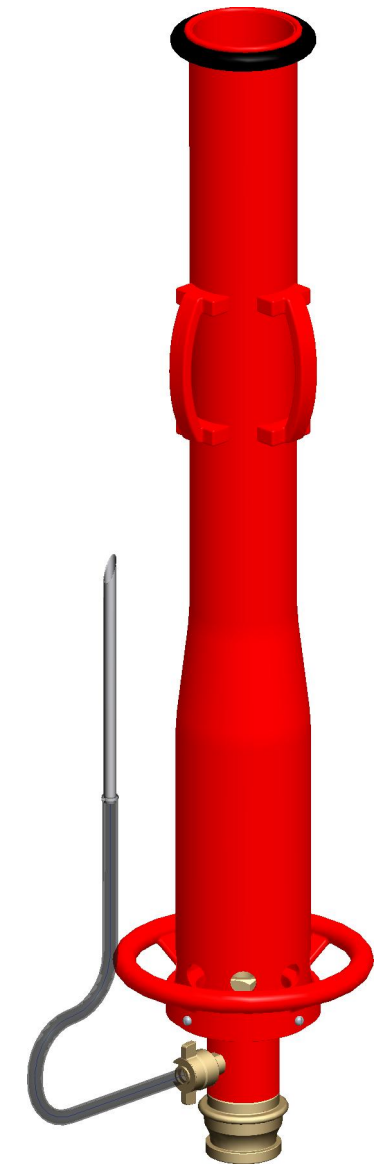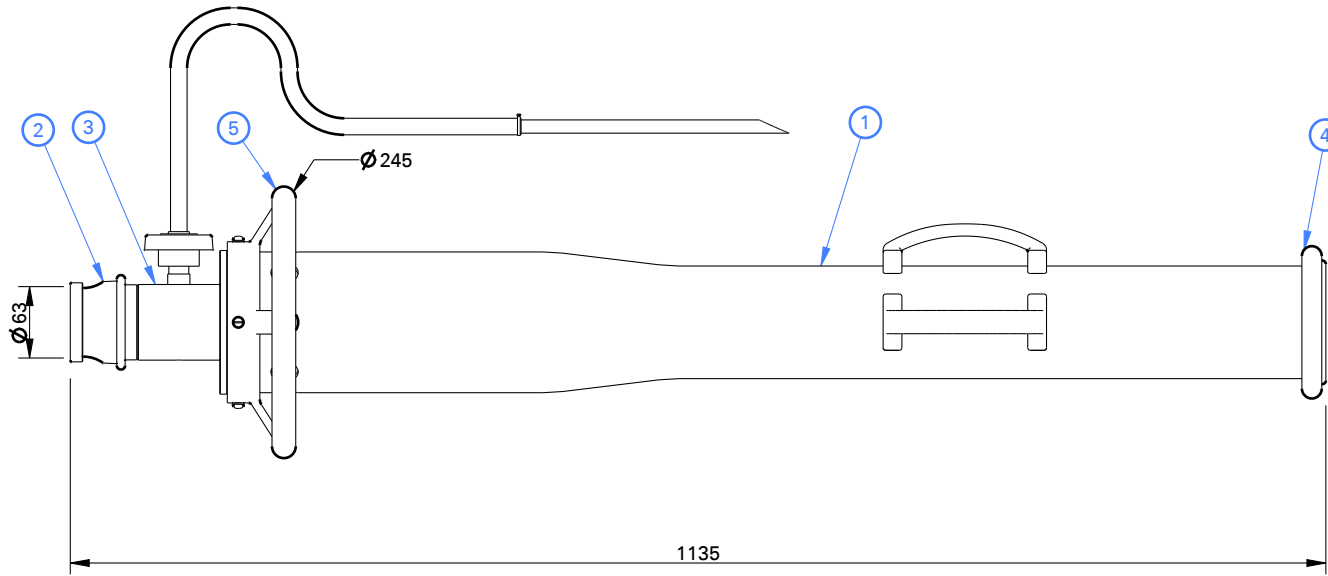

PERFORMANCE DATA						
TYPE	PRESSURE (KGF/CM2)	DISCHARGE CAP. LPM WATER		FOAM %	THROW Mtrs.	EXPANSION Min.
		Min.	Max.			
FB 20X	7 TO 7.5	900	1000	3 TO 4	25	10 TIMES

1	Pipe	Alu. IS: 738
2	Male Inst.	G.M IS: 318 LTB-2
3	Body	Alu. IS: 617
4	Oring	Rubber IS: 937
5	Handle/Grip	Alu. IS: 617
NO.	DESCRIPTION	MATERIAL
PART LIST		



Shah Bhogilal Jethalal & Bros.

AHMEDABAD

TITLE :

Low Expansion Foam Branch, 900 Lpm Capacity, Aluminium, Self-Inducting

SCALE

N.T.S

DRAWING NO:

A262A-900BJ

SHEET

1 OF 1

REV.

0